







TREES QUESTION

EXISTING CURB  
AND MODIFICATION

CURB TO BE REMOVED  
ARTIFICIAL GRASS TO THE  
BUILDING



FOX RD.,  
NORTH SIDE





FOX RD

(24)

(12)

Distance 974 ft

Start new





FOX RD,  
SOUTH SIDE





MODEL# 719 - FOOTING

OUTDOOR CREATIONS, INC.


SCALE: 1" = 24"

DATE:


DRAWN BY: MNC

Minimum below grade  
Add height needed above grade

ELEVATION

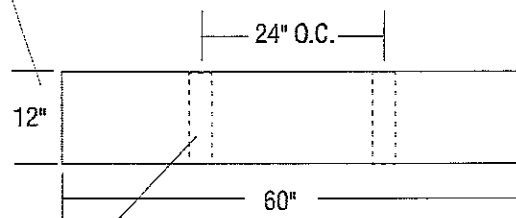


SECTION



3" grout pockets

PLAN

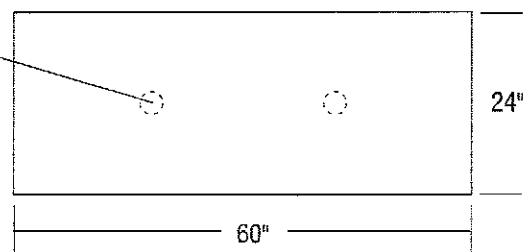


1. Cast (2) mounting thru holes (grout pockets) minimum diameter 3", in footing as shown.

2. Insert pipe (supplied with sign) into holes in bottom of sign.

3. Fill grout pockets with liquid grout cement and lower sign onto footing, using epoxy between sign and footing for final anchoring.

This footing is the minimum below grade requirement as recommended by Outdoor Creations, Inc. Any additional requirement such as additional height, inset mounting pocket, changes to mounting method for local code requirements, etc. to be the responsibility of the customer.



**OUTDOOR  
CREATIONS  
INC.**

2270 Barney Street  
Anderson, CA 96007  
(530) 365-6106  
FAX (530) 365-5129





PLANTED TO  
STAY

REPLACE MENT  
FLAG POLE

FALL  
PROTECTION  
SAFETY SYSTEMS  
INC. AND ASSOCIATES  
1000 S. 10TH AVE. SUITE 100  
DENVER, CO 80202  
(303) 733-1111